


mine



moon




silver




dimgray

special pieces

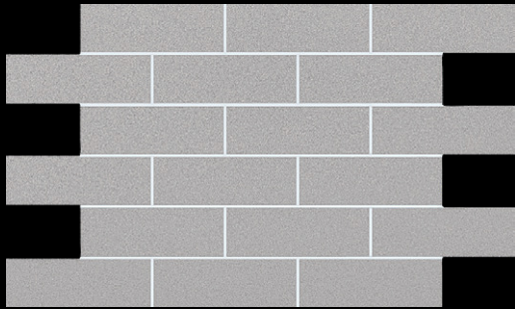

brick chip









mosaic (23 x 48mm)








sizes and specifications

Sizes (mm):	Finishes:	Colours:	Special Pieces:	Sizes (mm):	Finishes:	Colours:
600 x 1200	Natural	All	Mosaic (23 x 48mm)	300 x 300	Natural Honed	All
600 x 600	Natural Honed	All	Brick Chip	50 x 150	Natural Honed	All
450 x 450	Natural Honed	All	Skirting Tile	80 x 600	Natural	All
300 x 600	Natural	All	Skirting Tile	80 x 450	Natural	All
300 x 600	Natural	All	Step Tile	450 x 450	Natural Honed	All



technical specifications

	technical data	standard	requirement	collection value
	sides	EN ISO 10545-2	± 0.6% max	± 0.1%
	thickness	EN ISO 10545-2	± 5.0% max	± 5%
	straightness of sides	EN ISO 10545-2	± 0.5% max	± 0.1%
	rectangularity	EN ISO 10545-2	± 0.6% max	± 0.1%
	surface flatness	EN ISO 10545-2	± 0.5% max	± 0.2%
	water absorption	EN ISO 10545-3	< 0.5% max	≤ 0.02%
	bending resistance	EN ISO 10545-5	≥ 35 N/mm ²	46.7 N/mm ²

	technical data	standard	requirement	collection value
	abrasion resistance	EN ISO 10545-6	≤ 175mm ³	138mm ³
	coefficient of linear thermal expansion	EN ISO 10545-8	< 9 MK ⁻¹	∞ = 6.4x10 ⁻⁶ °C
	thermal shock resistance	EN ISO 10545-9	no visible defects	no damage
	frost resistance	EN ISO 10545-12	no visible defects or cracks	no damage
	chemical resistance	EN ISO 10545-13	no visible changes to surface	conforms
	stains resistance	EN ISO 10545-14	no permanent staining	conforms
	slip resistance	DIN 51130 RAMP TEST	R9-R13	R9 Natural Surfaces